


JFL-DC1

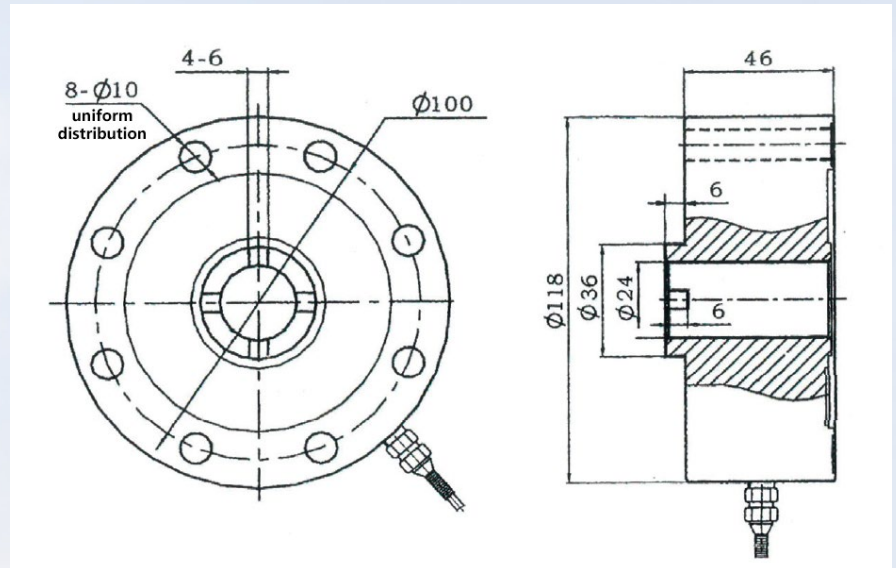

No.	Item	Spec.
1	Model	JFL-DC1
2	Capacity	5KN,10KN,20KN,50KN,100KN
3	Accuracy	0.05%F.S
4	Output sensitivity	2.0 MV/V
5	Creep	0.05%F.S/30min
6	Zero-point output	$\pm 1\%$ F.S
7	Temperature effect on zero	$\pm 0.05\%$ F.S/10°C
8	Temperature effect on output	$\pm 0.05\%$ F.S/10°C
9	Working temperature	-10 to +65°C
10	Input resistance	$375 \pm 5 \Omega$
11	Output resistance	$350 \pm 3 \Omega$
12	Insulation resistance	$> 5000 M\Omega$
13	Safe overload range	150%
14	Excitation voltage	10VDC
15	Material	Good quality alloy steel
16	Wire connection	Power +(red), power -(black), signal + (green), signal -(white)