
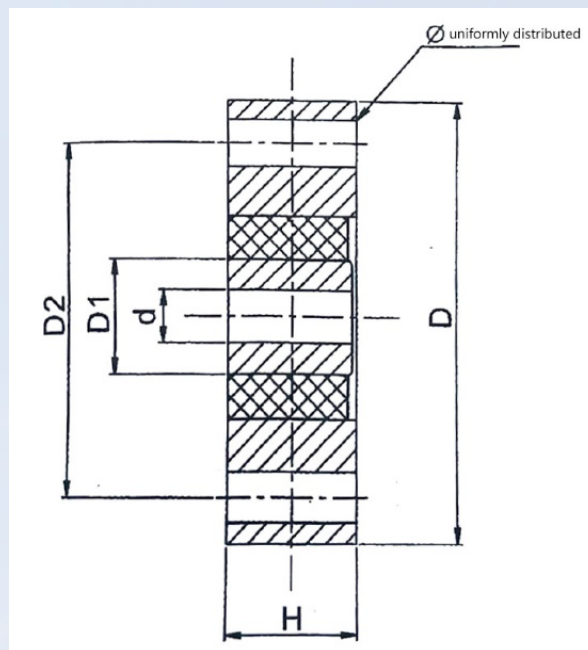


JFL-TK8

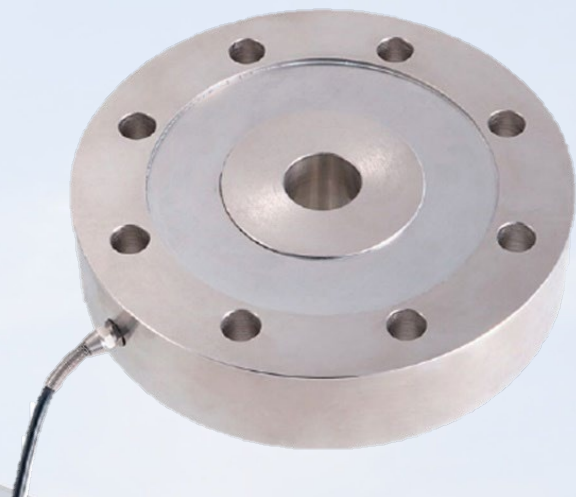

Capacity(KN)	Capacity(t)	d	D	D1	D2	H	Φ
0.5-5	0.05-0.5	12	90	22	75	25	4xΦ7
10	1	12	100	26	80	30	4xΦ11
20	2	24	125	42	105	42	8xΦ11
50-100	5-10	24	150	48	122	45	8xΦ11
200-300	20-30	30	180	70	142	53	8xΦ13.5
500-600	50-60	36	235	90	190	60	8xΦ17.5
1000	100	36	300	105	236	70	8xΦ22
2000	200	36	350	130	300	90	8xΦ25

No.	Item	Spec.
1	Model	JFL-TK8
2	Capacity(KN)	0.5,5,10,20,50,100,200,300,500,600,1000,2000
3	Accuracy	0.05%F.S, 0.1%F.S.
4	Output sensitivity	2.0 MV/V
5	Creep	0.05%F.S/30min
6	Zero-point output	±1%F.S
7	Temperature effect on zero	±0.03%F.S/10℃
8	Temperature effect on output	±0.05%F.S/10℃
9	Working temperature	-10 to +65℃
10	Input resistance	750±10Ω
11	Output resistance	700±5Ω
12	Insulation resistance	> 5000MΩ
13	Safe overload range	150%
14	Excitation voltage	10VDC
15	Material	Good quality alloy steel
16	Wire connection	Power +(red), power -(black), signal + (green), signal -(white)