


JFL-7E16

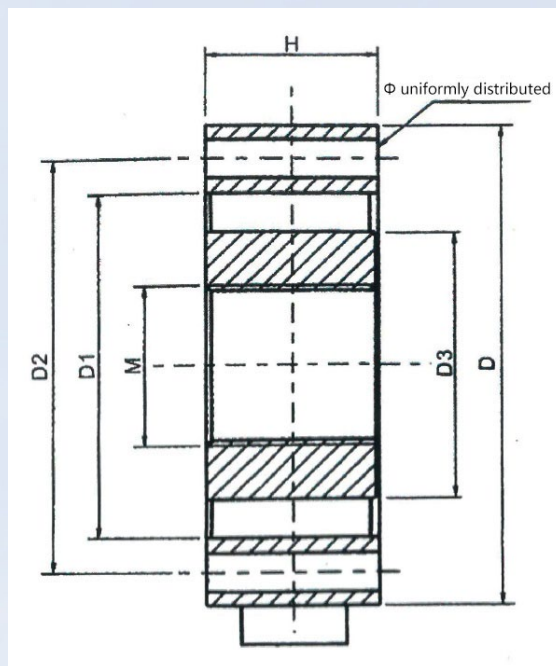

Capacity(KN)	Capacity(t)	D	D1	D2	D3	M	H	Φ
0.5-5	0.05-0.5	90	25	75	61	M16x1.5	25	4-Φ7
10	1	112	35	96	72	M20x2	30	8-Φ9
20	2	125	44	105	93	M24x2	42	8-Φ11
50-100	5-10	150	48	122	96	M30x2	45	8-Φ11
200-300	20-30	180	70	142	110	M42x3	53	16-Φ13.5
500-600	50-60	234	97	194	147	M64x3	60	16-Φ21.5
1000	100	320	162	270	220	M96x4	85	16-Φ26
2000	200	350	266	300	174	M120x3	90	16-Φ22

No.	Item	Spec.
1	Model	JFL-7E16
2	Capacity(KN)	0.5,5,10,20,50,100,200,300,500,600,1000,2000
3	Accuracy	0.05%F.S
4	Output sensitivity	2.0 MV/V
5	Creep	0.05%F.S/30min
6	Zero-point output	±1%F.S
7	Temperature effect on zero	±0.03%F.S/10℃
8	Temperature effect on output	±0.05%F.S/10℃
9	Working temperature	-10 to +65℃
10	Input resistance	750±10Ω
11	Output resistance	700±5Ω
12	Insulation resistance	> 5000MΩ
13	Safe overload range	150%
14	Excitation voltage	10VDC
15	Material	Good quality alloy steel
16	Wire connection	Power +(red), power -(black),signal + (green), signal -(white)