
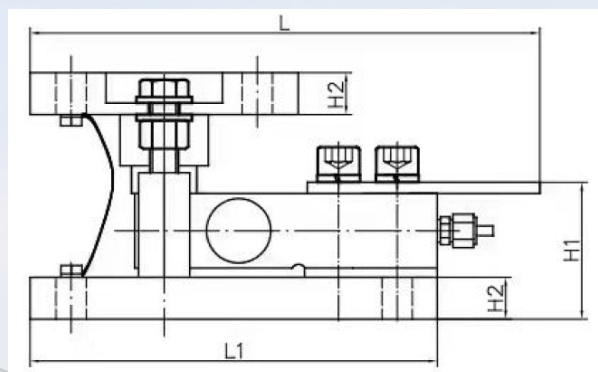
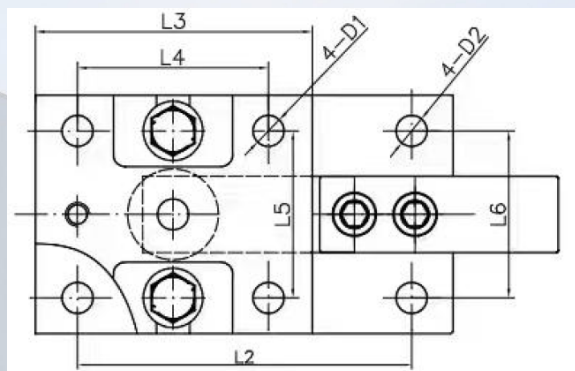


JFL-1320CM

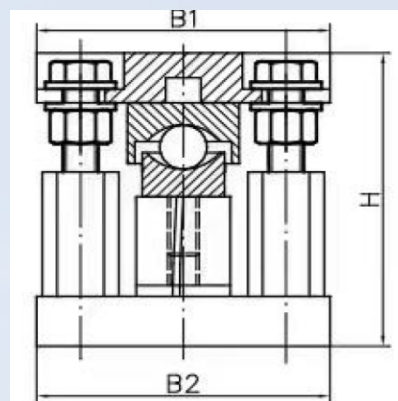

Capacity(t)	H	H1	H2	B1	B2	D1	D2	L	L1	L2	L3	L4	L5	L6
0.5/1/2	106	58	18	100	100	Φ13	Φ13	210	175	140	116	80	70	70
3	135	73	23	160	160	Φ17	Φ17	270	235	200	150	100	90	90

Technical parameters

Model: JFL-1320CM

Capacity: 0.5T-3T

Output sensitivity: $2.0 \pm 10\% \text{ MV/V}$

Zero point output: $\pm 1\% \text{ F.S.}$

Non-linear: $0.03\% \text{ F.S.}$

Excitation voltage: 5-15V

Safe overload: 150%

Cable: $\Phi 5.7 \times 3.5 \text{ m}$

Material: high quality alloy steel / SS

Output resistance: $350 \pm 3 \Omega$

Input resistance: $375 \pm 10 \Omega$

Comprehensive error: $\leq \pm 0.03\%$

Repeatability: $0.03\% \text{ F.S.}$

Working temperature: -20°C to $+60^\circ\text{C}$

Ultimate overload: 200%

Insulation resistance: $\geq 5000 \text{ M}\Omega (50 \text{ V})$

Wire connection: red: power +, black: power -